


- NOTES:**
1. REFER TO FIRESTONE WEBSITE FOR MOST CURRENT INFORMATION.
 2. WOOD NAILERS MUST BE INSTALLED WITH SUITABLE FASTENERS TO MEET APPLICABLE BUILDING CODES (200 LBS PER LINEAR FOOT MIN IN ANY GIVEN DIRECTION).
 3. ALL SHEETMETAL IS TO BE INSTALLED PER SMACNA GUIDELINES.
 4. FOR OPTIMAL RESULTS, EMBED GRANULES ON CAP SHEET PRIOR TO APPLYING ULTRAFASH LIQUID FLASHING.
 5. BOTH ULTRAFASH ONE-PART AND TWO-PART LIQUID FLASHING SHOULD BE APPLIED WITH A BOTTOM COAT, EMBEDMENT COAT, AND FINISH COAT OF 30 MILS WET THICKNESS EACH.
 6. ULTRAFASH ONE-PART LIQUID FLASHING MAY BE USED ON SBS, APP, OR BUR SYSTEMS (UP TO 20-YR WARRANTY). ULTRAFASH TWO-PART LIQUID FLASHING MAY ONLY BE USED ON SBS SYSTEMS (UP TO 30-YR WARRANTY).
 7. WHEN USING ULTRAFASH TWO-PART LIQUID FLASHING, APPLY ULTRAFASH LVOC PRIMER TO ALL NON-POROUS SURFACES.
 8. ALL MATERIAL AND INSTALLATION REQUIREMENTS FOR SBS PLATINUM WARRANTY MUST BE FOLLOWED TO BE ELIGIBLE FOR 30 YEAR PLATINUM WARRANTY.

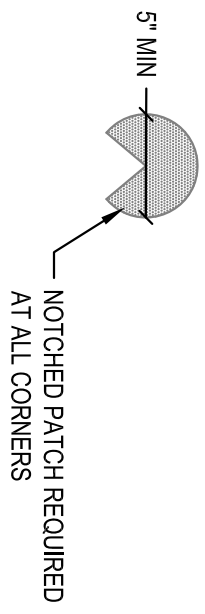

Firestone
 BUILDING PRODUCTS
 NOBODY COVERS YOU BETTER.™
 www.firestonebpc.com

ULTRAFASH™ SCUPPER
 ASPHALT SYSTEMS ACCEPTABLE SYSTEMS: MODIFIED BITUMEN

ISSUE/REVISION
 DATE: 04/28/2015
 NOT TO SCALE

DETAIL NO.
MB-S-2

MAXIMUM WARRANTY: 30 YEARS