

ZEE CLOSURE SET IN 3/16" x 7/8"
(4.8 mm x 63.5 mm) DOUBLE BEADED
BUTYL TAPE, FILL SPACE BETWEEN
ZEE & PANEL SEAM w/ URETHANE
SEALANT

APPROPRIATE FIRESTONE
FASTENER; 24" (609.6 mm)
O.C. MAX.

APPROPRIATE FIRESTONE
ANCHORING FASTENER

FIRESTONE APPROVED
UNDERLAYMENT

HIGH EAVE FLASHING


WOOD NAILER

HIGH EAVE CLEAT

APPROPRIATE FIRESTONE
FASTENER; 8" (203.2 mm)
O.C. MAX.


FIELD CRIMP WITH 6" (152 mm)
DUCK BILL PLIERS

1" MIN.
(25.4 mm)

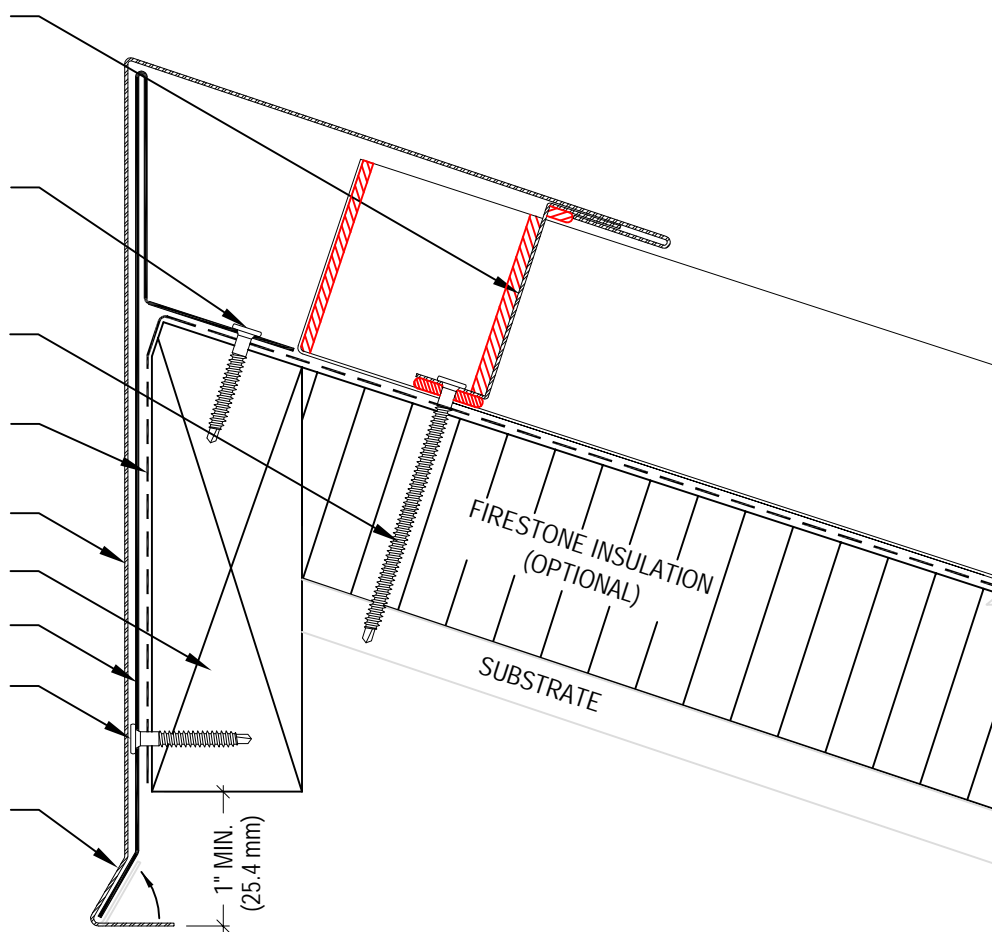

NOTES:

1. REFER TO FIRESTONE WEBSITE FOR MOST CURRENT INFORMATION.
2. REFER TO TECHNICAL INFORMATION SHEETS FOR FASCIA SIZES, ACCESSORIES, AND FINISHES AVAILABLE.
3. WOOD NAILER MUST BE INSTALLED TO MEET APPLICABLE BUILDING CODES OR 200 LBS PER LINEAR FOOT MINIMUM IN ANY GIVEN DIRECTION.
4. REFER TO THE FIRESTONE TECHNICAL DATABASE FOR FASTENER COMPATIBILITY WITH METAL.
5. APPLICATION DETAILS ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE APPROPRIATE FOR ALL BUILDING DESIGNS AND CONDITIONS.

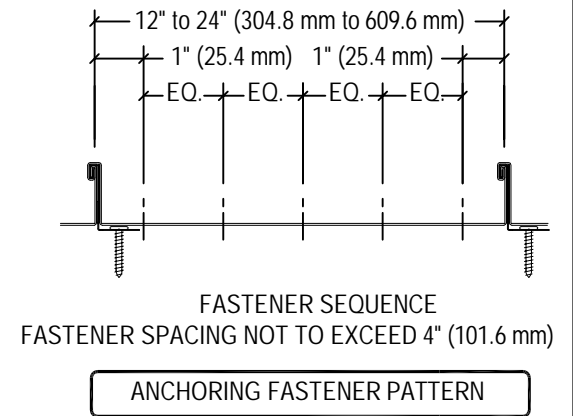

FASTENER SEQUENCE
FASTENER SPACING NOT TO EXCEED 4" (101.6 mm)

ANCHORING FASTENER PATTERN

FOR WARRANTY PERIODS GREATER THAN
20 YEARS REFER TO METAL QUICK SPECS
FOR MINIMUM REQUIREMENTS.

MAXIMUM WARRANTY: 20 YEARS