


**USE APPROPRIATE TERMINATION DETAIL**

WELDED SPLICE (SEE NOTE #4)

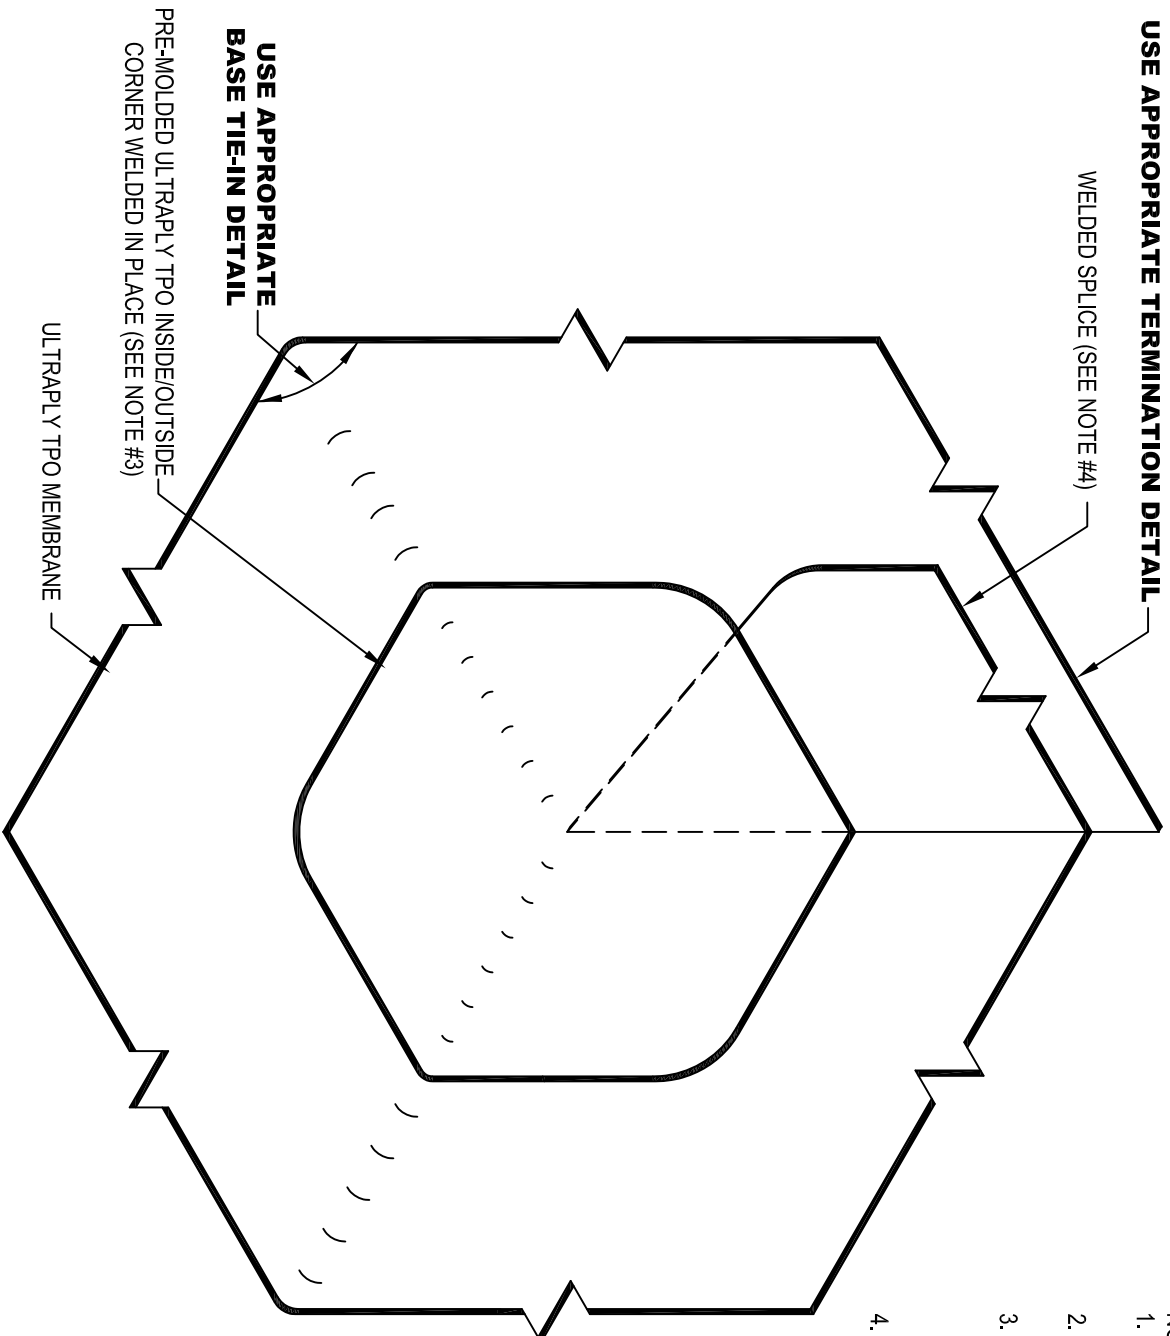

- NOTES:
1. REFER TO FIRESTONE WEBSITE FOR MOST CURRENT INFORMATION.
  2. REFER TO UT-LS-1 OR UT-LS-2 FOR WELD WIDTH.
  3. ULTRAPLY TPO FLASHING (UNSUPPORTED) MAY BE USED IN LIEU OF PRE-MOLDED ULTRAPLY TPO INSIDE/OUTSIDE CORNER **FOR A MAXIMUM WARRANTY OF 15 YEARS.**
  4. WHEN REINFORCEMENT OF TPO MEMBRANE IS EXPOSED, REFER TO UT-LS-14 FOR CUT EDGE SEALANT APPLICATION.

**MAXIMUM WARRANTY: 20 YEARS**

**INSIDE CORNER**

ULTRAPLY™ TPO

ACCEPTABLE SYSTEMS: ALL



**BUILDING PRODUCTS**

**NOBODY COVERS YOU BETTER.™**

www.firestoneppco.com

ISSUE / REVISION  
DATE:

7/01/2014

NOT TO SCALE

DETAIL NO.

**UT-C-5**