



STEP #1

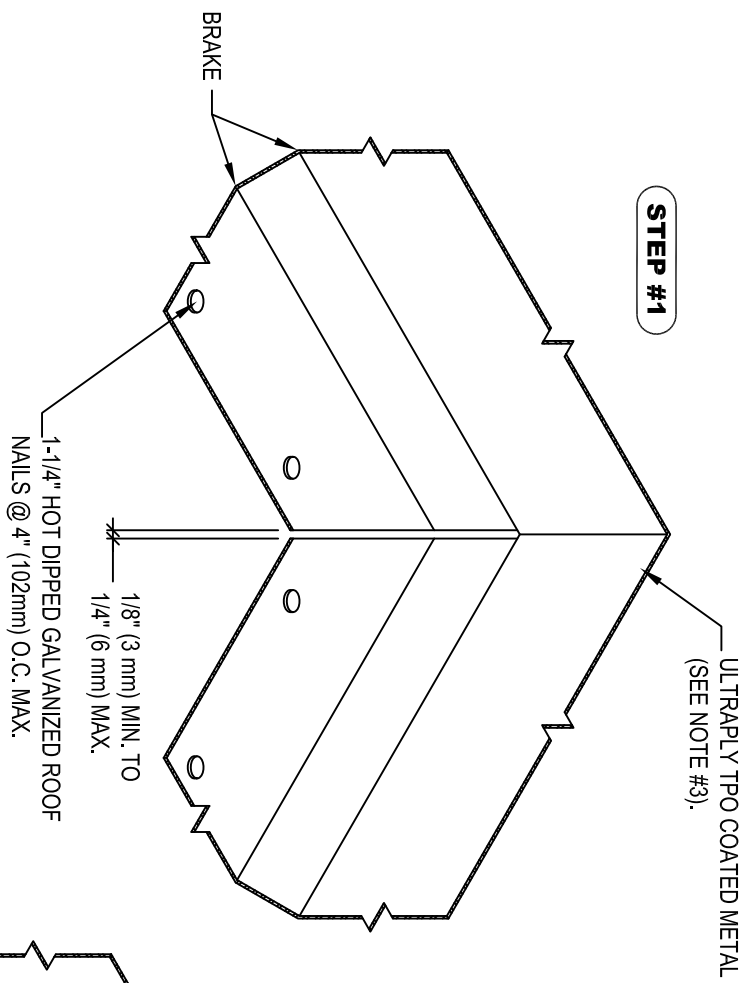

- NOTES:
1. REFER TO FIRESTONE WEBSITE FOR MOST CURRENT INFORMATION.
 2. REFER TO UT-LS-1 OR UT-LS-2 FOR WELD WIDTH, RECOMMENDATIONS.
 3. INSTALL METAL WORK TO SMACNA RECOMMENDATIONS.
 4. WHEN REINFORCEMENT OF TPO MEMBRANE IS EXPOSED, REFER TO UT-LS-14 FOR CUT EDGE SEALANT APPLICATION.

ULTRAPLY TPO MEMBRANE HEAT WELDED TO ULTRAPLY TPO COATED METAL (SEE NOTE #2)

STEP #2

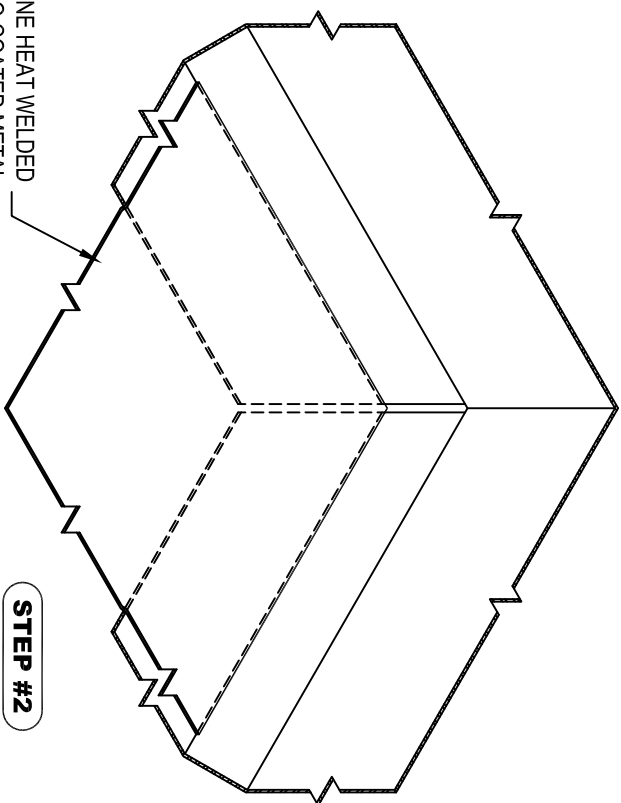

MAXIMUM WARRANTY: **20 YEARS**

INSIDE CORNER WITH ULTRAPLY TPO COATED METAL (WITH BRAKE) INSTALLATION STEPS 1 & 2

ULTRAPLY™ TPO

ACCEPTABLE SYSTEMS: ALL

ISSUE / REVISION DATE:

7/01/2014

NOT TO SCALE

DETAIL NO.

UT-C-8a