



NOTE:
REFER TO FIRESTONE WEBSITE FOR MOST
CURRENT INFORMATION.

FOR MECHANICALLY ATTACHED ULTRAPLY TPO ROOFING SYSTEMS

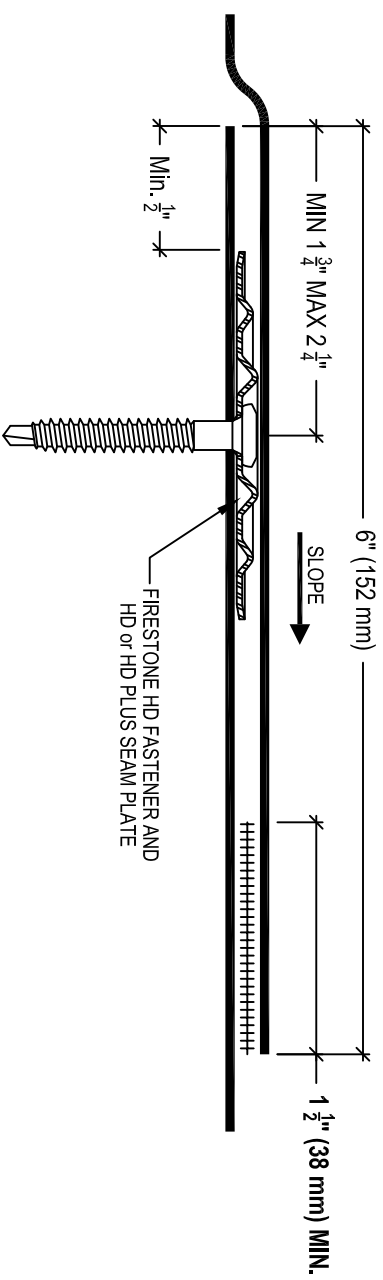

FOR FULLY ADHERED, BALLASTED, INVISIWELD, AND SA ULTRAPLY TPO ROOFING SYSTEMS

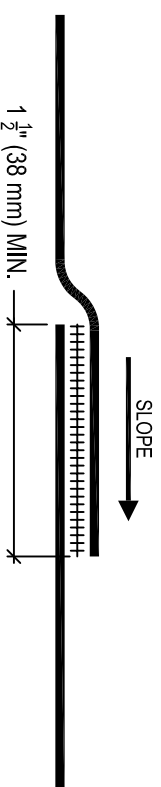

WHEN POLYESTER REINFORCEMENT OF TPO IS EXPOSED, APPLY CUT EDGE TREATMENT TO ENTIRE EXPOSED EDGE. REFER TO UT-LS-14.

LAP SPlice WITH 1-1/2" AUTOMATIC WELDER	
ULTRAPLY [™] TPO	
ACCEPTABLE SYSTEMS: ALL	

MAXIMUM WARRANTY: 20 YEARS	ISSUE / REVISION DATE: 12/22/2015	DETAIL NO. UT-LS-1
	NOT TO SCALE	