


- NOTES:
1. REFER TO FIRESTONE WEBSITE FOR MOST CURRENT INFORMATION.
 2. WOOD NAILER MUST BE INSTALLED TO MEET APPLICABLE BUILDING CODES OR 200 LBS PER LINEAR FOOT MINIMUM IN ANY GIVEN DIRECTION.
 3. FLANGE OF METAL MUST BE FULLY SUPPORTED BY WOOD AND TERMINATED AT LEAST 12" (13 mm) FROM EDGE OF WOOD.

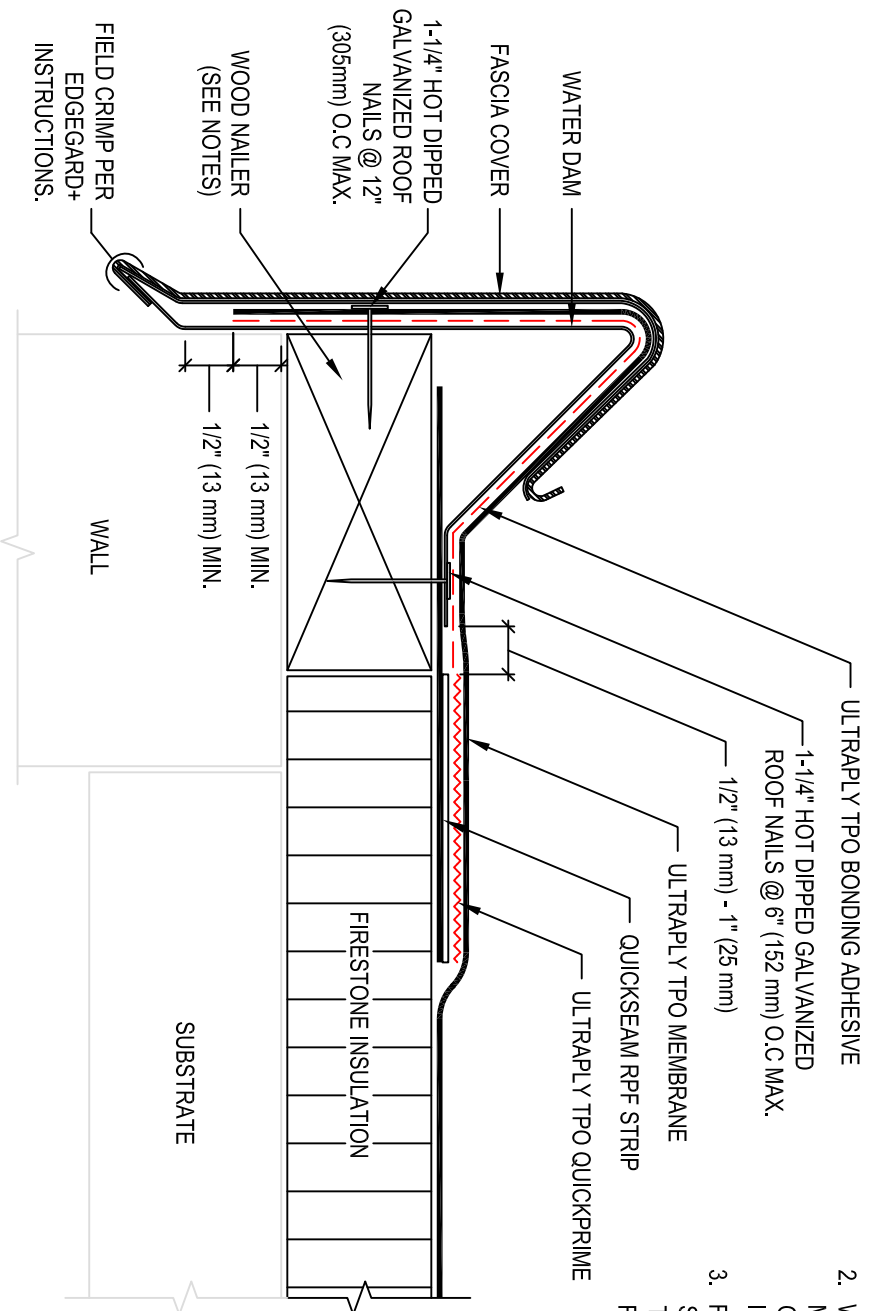

MAXIMUM WARRANTY: **20 YEARS**

ROOF EDGE WITH FIRESTONE EDGEWARD + AND QUICKSEAM RPF STRIP

ULTRAPLY™ TPO

ACCEPTABLE SYSTEMS: MAS, BALLASTED

ISSUE / REVISION
DATE:

6/25/2014

NOT TO SCALE

DETAIL NO.

UT-RE-8