NOTES:

1. REFER TO FIRESTONE WEBSITE FOR MOST CURRENT INFORMATION.
2. WOOD NAILER MUST BE INSTALLED TO MEET APPLICABLE BUILDING CODES OR 200 LBS PER LINEAR FOOT MINIMUM IN ANY GIVEN DIRECTION.
3. FLANGE OF METAL MUST BE FULLY SUPPORTED BY WOOD AND TERMINATED AT LEAST 1/2" (13 mm) FROM EDGE OF WOOD.

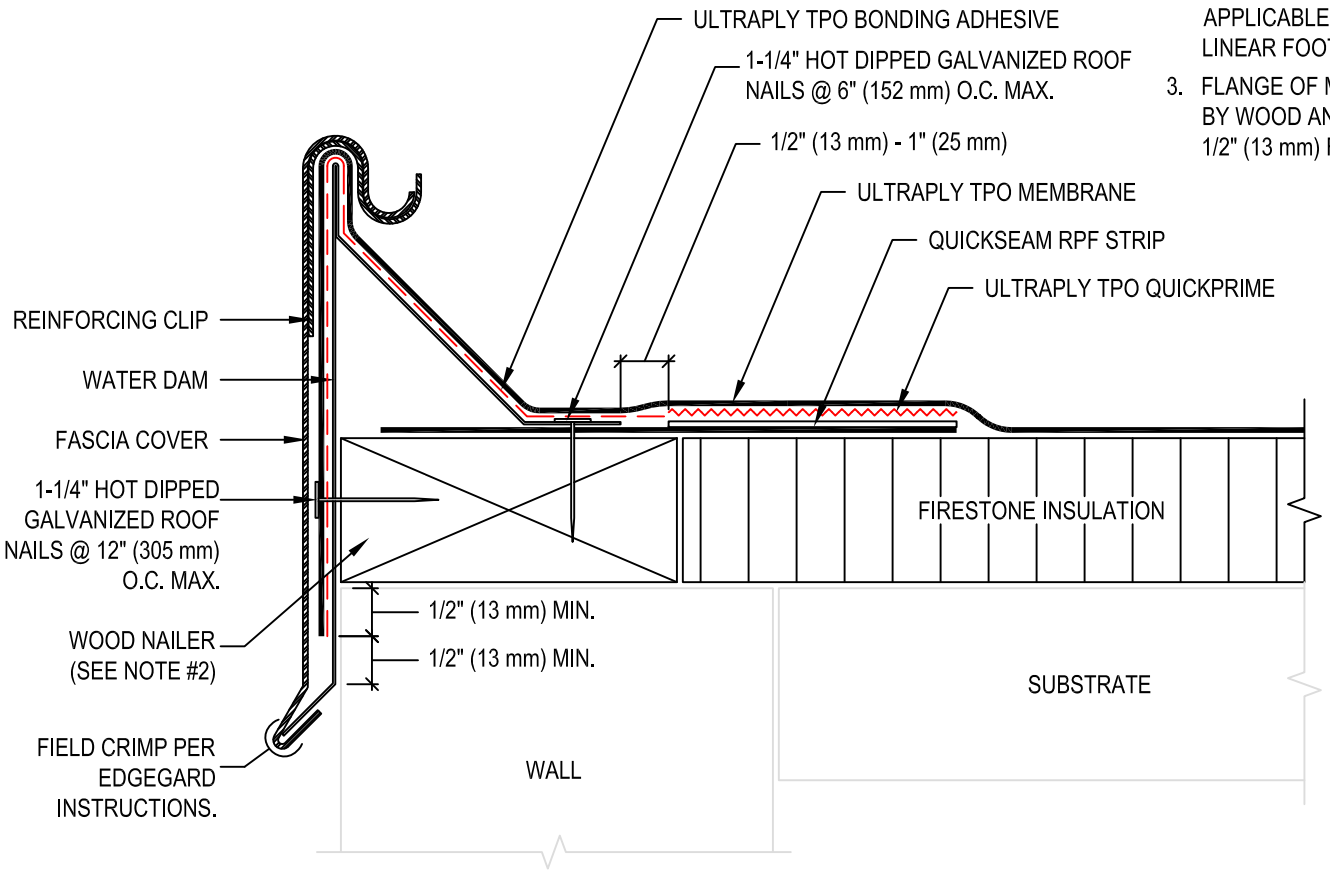

MAXIMUM WARRANTY: **20 YEARS**

Firestone BUILDING PRODUCTS
NOBODY COVERS YOU BETTER.™
www.firestonebpco.com

ROOF EDGE WITH FIRESTONE EDGEGARD AND QUICKSEAM RPF STRIP

ULTRAPLY™ TPO

ACCEPTABLE SYSTEMS: MAS, BALLASTED

ISSUE / REVISION DATE: 6/25/2014

NOT TO SCALE

DETAIL NO. UT-RE-11