



LAYOUT ATTACHMENT M-9-2-12  
 FOR ANY PANEL WIDTH MECHANICALLY ANCHORED SYSTEM  
 FOR UP TO A 40' (12.19M) ROOF HEIGHT

TWO BATTEN STRIPS  
 4'0" (1.21M) O.C.

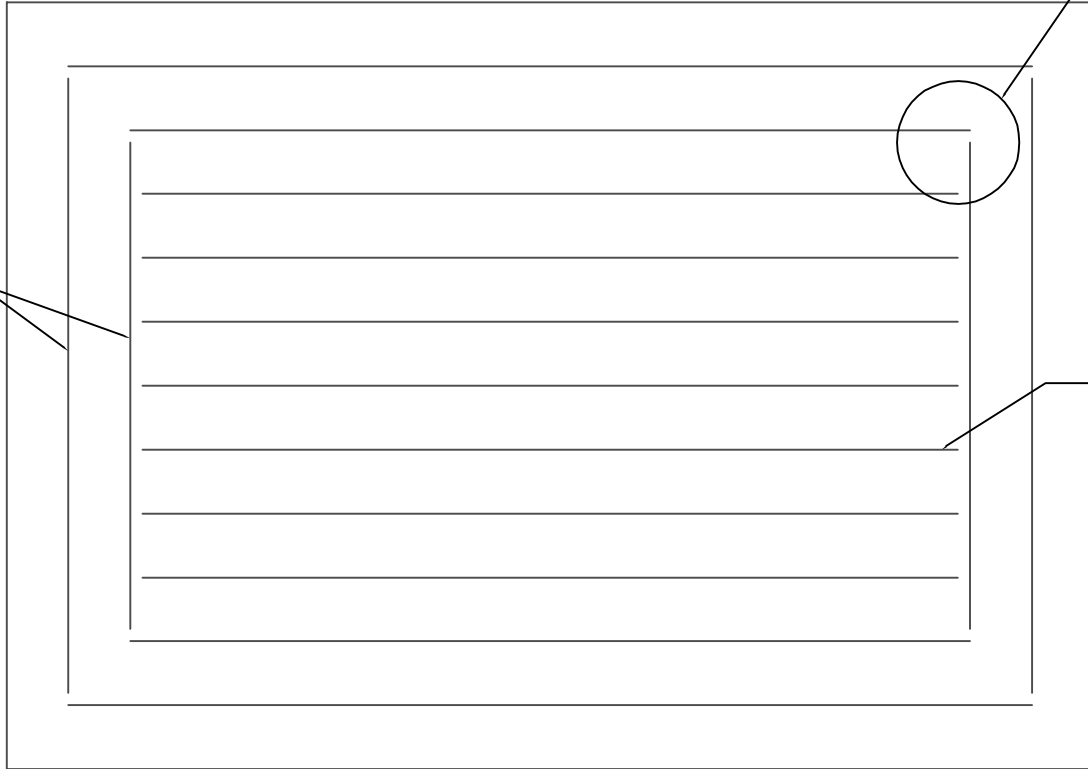

Firestone Batten Fastened  
 12" (304.8mm) O.C.

THE FASTENING RATE SHOWN ON THIS LAYOUT IS BASED UPON FASTENER PULLOUT VALUES OF 400 LBS (181.4kN) OR GREATER. IF PULLOUT VALUES ARE LESS THAN 400 LBS. (181.4kN) , USE THE FOLLOWING FASTENER SPACING:

PULLOUT	SPACING
300lbf (136.1kN)–399lbf (181kN)	12" (304.8 mm)–6" (152.4 mm)–12" (304.8 mm) O.C.
200lbf (90.7kN)–299lbf (135.6kN)	6" (152.4 mm) O.C.

NOTE: THESE DRAWINGS REPRESENT  
 FIRESTONE'S MINIMUM REQUIREMENTS  
 AND DO NOT NECESSARILY MEET  
 CODES.

MAXIMUM WARRANTY: 20 YEARS

**Firestone**  
 BUILDING PRODUCTS  
 NOBODY COVERS YOU BETTER.™  
 www.firestonebpc.com

**M-9-2-12**

**RUBBERGARD™ EPDM**

ACCEPTABLE SYSTEMS: MAS

ISSUE / REVISION  
 DATE:  
 1/1/2006

NOT TO SCALE

DETAIL NO.