


USE APPROPRIATE TERMINATION DETAIL

WELDED SPICE (SEE NOTE #4)

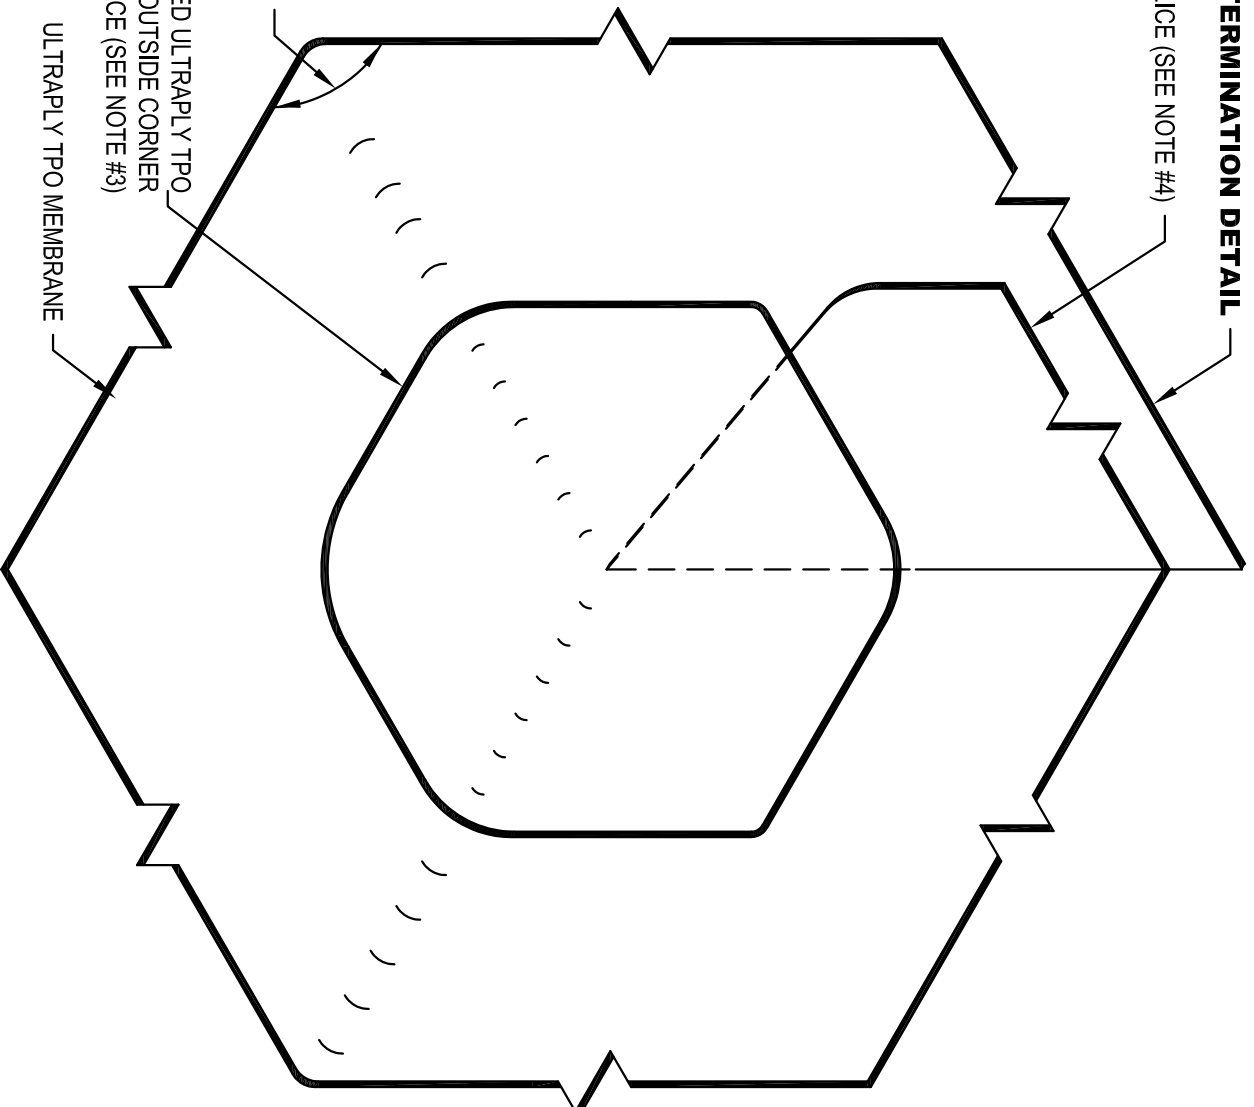

**USE APPROPRIATE
BASE TIE-IN DETAIL**

PRE-MOLDED ULTRAPLY TPO
INSIDE/OUTSIDE CORNER
WELDED IN PLACE (SEE NOTE #3)

ULTRAPLY TPO MEMBRANE

NOTES:

1. REFER TO FIRESTONE WEB SITE FOR MOST CURRENT INFORMATION.
2. REFER TO DETAIL TPO-SA-LS-1 OR TPO-SA-LS-2 FOR WELD WIDTH.
3. ULTRAPLY TPO FLASHING (UNSUPPORTED) MAY BE USED IN LIEU OF PRE-MOLDED ULTRAPLY TPO INSIDE/OUTSIDE CORNER.
4. WHEN REINFORCEMENT OF TPO MEMBRANE IS EXPOSED, REFER TO TPO-SA-LS-7 FOR CUT EDGE SEALANT APPLICATION.

MAXIMUM WARRANTY: 20 YEARS

ISSUE / REVISION
DATE:

07/01/2015

DETAIL NO.

UT-C-5A

INSIDE CORNER

ULTRAPLY TPO

ACCEPTABLE SYSTEMS: ALL TPO SYSTEMS